

ECO Spot B300PCE LED Gobo Projector

Weather- and Dustproof Projector for Rough Environments

- **Passive Cooling** - No moving parts such as fans or motors.
- Ideal for dusty and wet industrial environments.
- For very bright environments, extra large projection sizes and distances.
- Interchangeable Projection Lenses, for wide projection distance/size range.
- Takes std. **M-size gobos**, up to Full Color.



SPECIFICATIONS:

Order Code: ES-B300PCE
Power Supply: 95-265V, 50-60Hz, 320W

Other Build Options: ES-B300E with active cooling and gobo rotator, Passive Cooled models in lower wattages

Lamp Type: LED 300W
LED Power Range: Adjustable 90 to 270W
Rated Life: 25,000 to 60,000h depending on power setting
Color Temperature: 8,000k +/-500k
Luminous Flux: 20,000lm (effective flux 11,500lm)

Projection Lenses: Semi-Narrow: f=210mm/13°, Medium: f=140mm/20°
Semi-Wide: f=115mm/25° Wide: f=87mm/30°
Gobo Dimensions: M-Size (OD66mm, ID48mm), max. thickness: 5mm
Gobo Types: Glass and Metal, **NO** film material

PROJECTION RANGE

Bright environment: - up to 90ft
Dim environment: - up to 200ft
Dark environment: - up to 400ft (or more in very dark conditions)

SAFETY STANDARDS


Projector: IP62 (self rated), UL in preparation

Driver: IP65, UL8750(type"HL"), CSA C22.2 No. 250.0-08, ENEC, TUV EN61347-1, EN61347-2-13, J61347-1, J61347-2-13 approved; design refer to UL60950-1, TUV EN60950-1

ECO Spot B300PCE LED Gobo Projector

Dimensions:

Projector Body: 14.5 x 16.5 x 12in
Weight: 40lbs

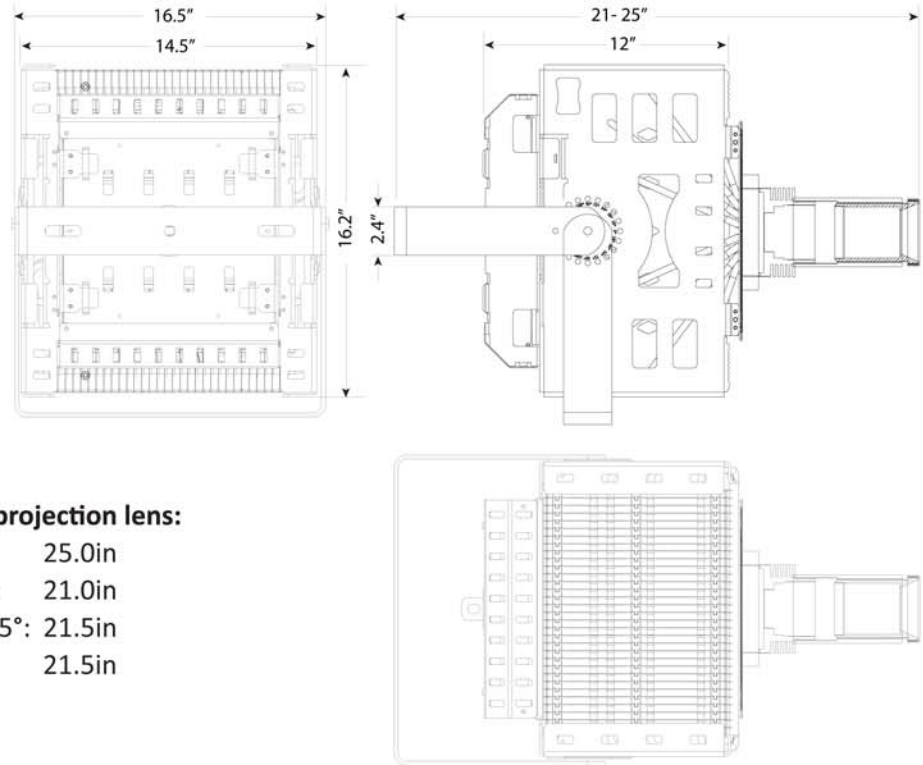

Total length including the projection lens:

- Narrow: f=210mm/13°: 25.0in
- Medium: f=140mm/20°: 21.0in
- Semi-Wide: f=115mm/25°: 21.5in
- Wide: f=87mm/30°: 21.5in

| ECO Spot™ Photometrics | | | | | | ECO Spot is a Trademark of Globus New Media LLC dba Gobosource | | | | | | | | | | | | | | | | | | | |
|---------------------------------------|-------------------|-------------|------------|--------------|---------|--|----------------------------------|---|---|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|--|--|--|
| Model Gobo Size | Color Temp. | Lens | Beam Mult. | Effective lm | CD | Value | PROJECTION DISTANCE IN FEET (ft) | | | | | | | | | | | | | | | | | | |
| ES-LED-B300E M-Size ID=48mm | 6000k +/- 500K | 200mm (15°) | 0.25 | 10527 | 214,560 | Size (ft) | 3 | 6 | 9 | 12 | 15 | 18 | 24 | 30 | 36 | 42 | 64 | 88 | 112 | 136 | 200 | 250 | | | |
| | | | | | | Brightness (fc) | | | | | | | | | | | | | | | | | | | |
| | | 140mm (20°) | 0.35 | 12462 | 129,600 | Size (ft) | | | | | | | | | | | | | | | | | | | |
| | | | | | | Brightness (fc) | | | | | | | | | | | | | | | | | | | |
| | | 115mm (25°) | 0.42 | 11400 | 83,520 | Size (ft) | | | | | | | | | | | | | | | | | | | |
| | | | | | | Brightness (fc) | | | | | | | | | | | | | | | | | | | |
| | | 87mm (30°) | 0.55 | 10600 | 44,640 | Size (ft) | | | | | | | | | | | | | | | | | | | |
| | | | | | | Brightness (fc) | | | | | | | | | | | | | | | | | | | |

ECO Spot is a Trademark of Globus New Media LLC dba Gobosource Copyright ©2015 GoboSource™

| How to Read the Illumination Values | |
|-------------------------------------|---|
| Foot Candles (ft) | For a quick overview, the illumination values in the tables are color coded. There are many factors that determine the visibility of a projection, such as ambient light, color and reflectiveness of the projection surface, competing light, gobo colors, projector color temperature, and other factors. Therefore our recommendations should only be used as guidelines and we cannot guarantee a successful application. If you are unsure, please call us to discuss. |
| Projection Size Calculation | For the resulting Projection Size at any given Distance, Multiply the number in the "Beam Mult." column with your Projection Distance. Projection Size = Distance x Beam Mult. For the Distance needed to achieve a desired Projection Size, Divide the Projection size by the Beam Multiplier. Distance = Projection Size / Beam Mult. |
| 300+ | Extreme brightness for extremely bright environments, i.e. bright areas, additionally flooded with daylight, such as Lobby-, Retail-, Trade Show-, Environment. Outdoors (shady, no direct sunlight). Color gobos project in vibrant colors. |
| 45-300 | Very high brightness for very bright environments, such as Office-, Lobby-, Retail-, Trade Show-, Environment. Color gobos project in vibrant colors. Outdoors well visible at night with vibrant colors. |
| 15-45 | Sufficient brightness for regular environments, such as Bars, Clubs, and intimate Restaurants, Theaters, and dimmed Conference rooms. Outdoors well visible at night. Color gobos should preferably be used with lighter colors and the projection surface should be light and somewhat reflective. |
| 15-3 | Only advisable for dark environments and subtle projection of light colored artwork, preferably on light, reflective projection surface. If all conditions are met, the max. listed image distance/size can be doubled in most cases. |

Metric Conversions: For Meters multiply feet by .3048. For Lux multiply footcandles by 10.76

PACKAGE CONTENTS

Power Cord • Test Gobo • Spare Gobo Retaining Ring • Integrated Gobo Mounts • User Manual

FORKLIFT TRAINING SYSTEMS

614-583-5749

www.forklifttrainingsystems.com

info@forklifttrainingsystem.com